




GYPSEMNA
GLASS FIBER
REINFORCEMENT GYPSUM
GYPSUM BOARD
GRG - 12.5mm

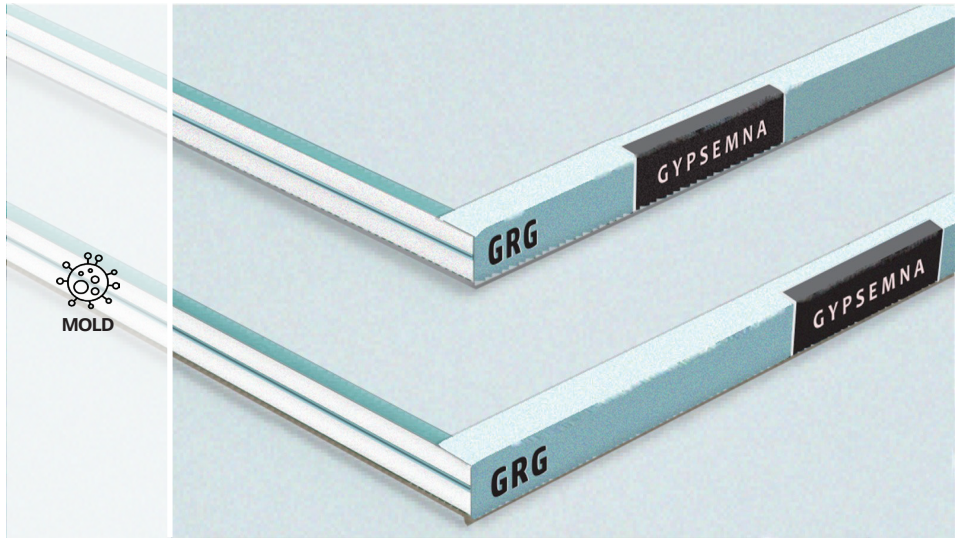

■ DESCRIPTION

The Gypsemna's Glass fiber Reinforcement Gypsum (GRG 12.5mm) Type C Gypsum Board is an interior gypsum board consisting of a solid set, Type C gypsum core enclosed in GREY colored face paper and an IVORY colored strong liner back paper. Gypsemna's RG Type C board. Long edges are slightly tapered, allowing joints to be reinforced and concealed with joint tape and joint compound. The face paper and the back paper are 100% recycled.

■ BASIC USES

Gypsemna's Glass fiber Reinforcement Gypsum (GRG 12.5mm) Type C Gypsum Board is used for interior walls and ceilings in all buildings categories applications. It can be used for new construction or renovations steel framing. The boards are typically screwed to studs spaced maximum (600 mm) also can be applied by laminating or with the use of an adhesive.

■ ADVANTAGES

- Consistently high quality
- Uniformly flat , attractive appearance , no shadow.
- High edge hardness.
- Uniform high strength cores eliminate crumbling, cracking.
- Edge tapers consistent to form perfect joints.
- Excellent thermal barrier and sound attenuation qualities.
- Green certified & Qualifies as a low VOC.

■ TECHNICAL DATA

PHYSICAL PROPERTIES

Thickness, Nominal
Width, Nominal
Length, Standard
Weight, Nominal
Edges
Color

12.5 mm
1200 mm
2400, 3000 mm
10.37 kg/m²
TE , SE
Grey/Ivory Color

FIRE RESISTANCE - ASTM E84

Core Type
Combustibility
Surface Burning Characteristics
Flame Spread
Smoke Development

Type C
non combustible core
Class A
0
15

■ STANDARDS & REFERENCES

ASTM C1396

Standard Specification for Gypsum Panel Products.

ASTM C473

Standard Test Method for physical testing of Gypsum Panel Products.