




GYPSEMNA
MOISTURE RESISTANT

GYPSON BOARD
MR- 15 mm

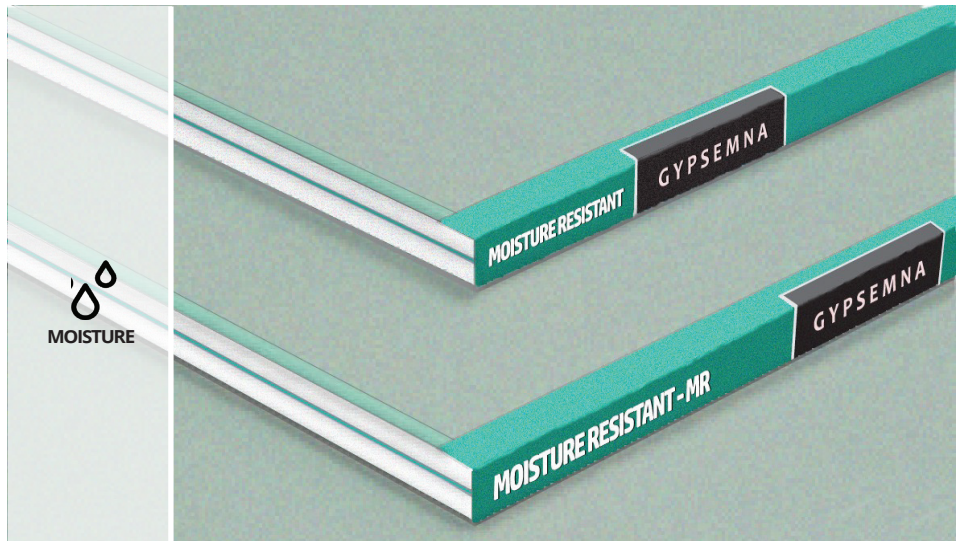

■ DESCRIPTION

The Gypsemna's MOISTURE RESISTANT (MR- 15mm) Type C Gypsum Board is an interior gypsum board consisting of a solid set, Type C gypsum core enclosed in Green colored face paper and a strong liner back paper. Gypsemna's MR Type C board features a specially formulated core providing moisture resistance when used in wet area. Long edges are slightly tapered, allowing joints to be reinforced and concealed with joint tape and joint compound. and concealed with joint tape and joint compound. The face paper and the back paper are 100 % recycled.

■ BASIC USES

Gypsemna's MOISTURE RESISTANT (MR- 15mm) Type C Gypsum Board is used for all interior walls and ceilings in all building applications requiring extended moisture resistance, this makes Gypsemna MOISTURE RESISTANT an ideal choice to use in wet areas such as kitchens, bathrooms, laundries..etc. It is also designed as a substrate for ceramic tiles.

■ TECHNICAL DATA

PHYSICAL PROPERTIES

Thickness, Nominal
Width, Nominal
Length, Standard
Weight, Nominal
Edges
Color

15 mm
1200 mm
2400, 3000 mm
10.90 kg/m²
TE, SE
Light Green Color

FIRE RESISTANCE - ASTM E84

Core Type
Combustibility
Surface Burning Characteristics
Flame Spread
Smoke Development

Type C
non combustible core
Class A
0
15

■ ADVANTAGES

- Consistently high quality.
- Moisture Resistance.
- Uniformly flat, attractive appearance and no shadows.
- High edge hardness.
- Uniform high strength cores eliminate crumbling and cracking.
- Edge tapers consistent to form perfect joints.
- Excellent thermal barrier and sound attenuation qualities.
- Green certified.
- Qualifies as a low VOC.

■ STANDARDS & REFERENCES

ASTM C1396

Product Standard Compliance

ASTM C473

Standard Test Methods for physical testing of gypsum panel products.

ASTM C840

Standard Specification for application and finishing of gypsum board.

ASTM E84

Standard Test Method for Surface Burning Characteristics Of Building Material

En 520, (A and H1)

Standard for performance of gypsum plasterboard.