




GYPSEMNA HDU TRACK

METAL PROFILES

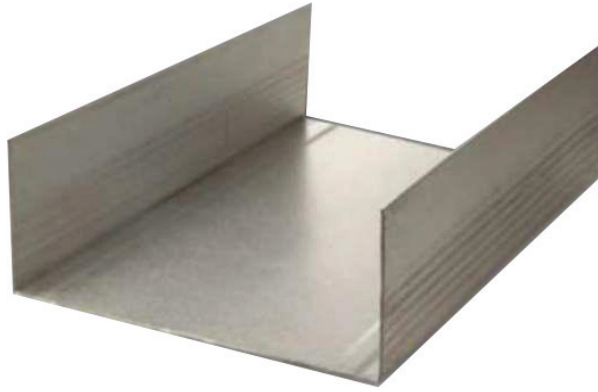


DESCRIPTION

Gypsemna's HEAD DEFLECTION U TRACK section provides a friction for the stud, which not only holds the studs in position until the lining board is fitted, but also helps in aligning the boards. Components for drywall stud and track products are cold roll-formed from hot-dipped galvanized steel (corrosion resistant) and are available in a variety of sizes and thicknesses

BASIC USES

Gypsemna's HEAD DEFLECTION U TRACK is the horizontal top elements of drywall structure into which the corresponding vertical C STUD is fitted, allows a vertical movement from the ceiling/roof. This vertical deflection prevents loads from being transferred to the studs. Strong non load bearing component for exterior and interior drywall partition, ceilings and liners.



ADVANTAGES

- For all areas requiring a smoothly finished, monolithic wall plane.
- Fire resistant ratings.
- Flexibility of configuration.
- Dimensionally stable.
- Impervious to rot, fungal and insect attack.
- Corrosion resistant.
- Won't warp, twist or bow
- Easily worked, few tools required
- Non-combustible

TECHNICAL DATA

PHYSICAL PROPERTIES

Coating	Z275 Zinc coating / Z180 Zinc coating / Z120 Zinc coating
Standard Compliance	ASTM C645 / ASTM A653 ASTM A645 / ASTM A370
Material	Cold roll - formed from hot - dipped galvanized steel
Grade Min Yield Strength Min Tensile strength	G300 300 mpa 340 mpa
Available Thicknesses (in mm)	0.50, 0.55, 0.6, 0.7 , 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, and 1.5
Flange (in mm)	50
Width (in mm)	52, 66, 72, 78, 94, 102, 127, and 152
Length (in mm)	3000